



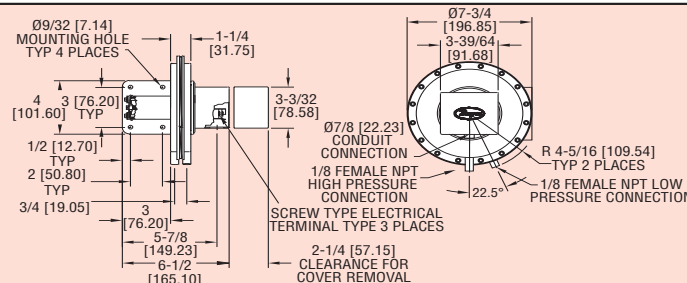

Series
1640

Floating Contact Null Switch for High and Low Actuation

Visual Set Point Adjustment...Adjustable Null Zone



The unique electric switch design in the 1640 is another Dwyer Instruments, Inc. innovation. The Dwyer® Model 1640 Differential Pressure Switch resembles the Series 1630 switches described on the previous page. The Model 1640, however, is equipped with a single pole, double throw floating contact switch (not snap acting) so it functions as a null switch.

Drawing shows the switching action schematically. As the diaphragm moves in response to pressure changes, it moves the floating contact to cause switching action at two preset points with no switching action between these points. The “high” circuit will be closed when rising pressure differential reaches the preset level. The “low” circuit will be closed when falling pressure differential reaches the preset level.

Model	Ranges Inches, w.c.	Adjustable Null Span	
		Min. Set	Max. Set
1640-0	.01 to 0.2	.01	.03
1640-1	0.2 to 1.0	.02	.06
1640-2	1.0 to 4.0	.03	.12

CAUTION: For use only with air or compatible gases.

SPECIFICATIONS

Service: Air and non-combustible, compatible gases.

Wetted Materials: Consult factory.

Temperature Limits: -30 to 110°F (-34.4 to 43.3°C).

Pressure Limits: 10 psig (68.95 kPa) continuous, 25 psig (172.4 kPa) surge.

Switch Type: Single-pole double-throw (SPDT) floating contact (not snap action).

Electrical Rating: Non-inductive — 2.5 A @ 110 VAC; 1.5 A @ 220 VAC; 1 A @ 24 VDC; 0.5 A @ 110 VAC; Inductive — 1 A @ 110 VAC; 0.5 A @ 220 VAC; 0.5 A @ 24 VDC (de-rate 70-80% for very low pressure changes).

Electrical Connections: 3 screw type, common, normally open and normally closed.

Process Connections: 1/8" female NPT.

Mounting Orientation: Diaphragm in vertical position. Consult factory for other position orientations.

Set Point Adjustment: Screw type.

Weight: 4 lb 13 oz (2.18 kg).

Agency Approvals: CE.

CALL TO ORDER: U.S. Phone 219 879-8000 • U.K. Phone (+44) (0)1494-461707 • Australia Phone (+61) (0) 2 4272 2055

37

Gekko, Inc.

P.O. Box 667306

Houston, Texas 77266

United States

GEKKO, INC.

Online Industrial Super Store

Phone: (713) 552-1629

Fax: (713) 527-0249

Email: store@gekko-inc.com

Web: www.gekko-inc.com